

ACCESSORIES

FOR AUTOMATIC LUBRICATOR



ACCESSORIES

- Progressive Distribution Blocks - 2,3,4,6,8,12 Port
- Battery Packs
- Brackets / Clamps
- Adaptors – Standard & Metric
- Remote Power/Control / DC Power Options
- Mounting Plates
- Weatherproof Caps (Optional)
- Nylon Hose
- Oil Brush

NEW PRODUCTS




Open Gear Sponge
Pinion Applicator



T T Thermalube Soft
Grease

www.atselectrolube.com

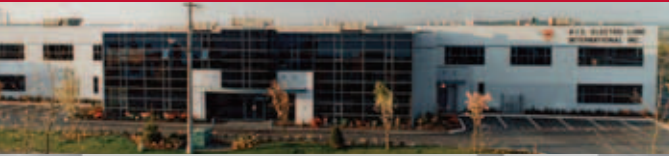

ABOUT US

A.T.S. ELECTRO-LUBE™ INTERNATIONAL INC. has been manufacturing and selling ELECTRO-LUBE™ Automatic Electronic Lube Dispensers worldwide for over 30 years. The product was invented and designed by our founder, and is manufactured in British Columbia, Canada.

With market trends changing, the company introduced a new line of motorized lubricators for the industrial market. The ULTIMATE LUBE™ series provides single and multi-point lubrication using progressive distribution blocks. These units are the most powerful self-contained lubricators in the world.

The TITAN CL LUBE™ was then introduced, which incorporates the proven pump and electronics of our ULTIMATE series while using industry standard grease cartridges for ease of refilling. The dual cartridge TITAN II motor-driven lubricant dispenser followed.

The latest additions to our product line of lubricators are the powerful TITAN OILER and the JACK-LUBE™. We also offer a variety of accessories to complement our products.

ATS is committed to improving and developing products to satisfy the growing needs of industries for decades to come. We will continue to adapt to market demands and expand our product line with the same dedication to quality as we always have. You can depend on ATS to sell only top-of-the-line, versatile, automatic lubrication equipment for your every application.



OVER 30 YEARS OF MANUFACTURING RELIABLE
LUBRICATION PRODUCTS FOR AN INDUSTRIAL WORLD

TYPICAL INDUSTRIES AND APPLICATIONS

Mining/Minerals	Stacker Cranes Crushers/Grinders/Shakers Bucket Elevators Conveyors Slurry Pumps Bridge Cranes Conveyors Hoists Heat Treat furnaces Chain Lubricators Robots
Manufacturing	Packaging Lines Mixers Washers, Dryers Can/Bottling Lines Ovens
Food and Beverage	Elevators/Escalators Motors HVAC Air Handlers/Filters Waste Water Treatment Potable Water Plants Incinerators Rolling Mills Material Handling Cooling Pumps Furnace Trunions and Fans
Building Maintenance	Lumber Mills Paper and Fiberboard Mfg. Slurry Pumps Dryers
Municipal	Flour Mills Grain Mills Feed Mills
Metals	Coal Handling Equipment Drills, Pumps Refinery Operations Wind Turbines
Pulp and Paper	
Agriculture	
Energy	

Distributed By:

WESTPOWER

+1 403 720 3300

orders@westpowergroup.com
westpowergroup.com




www.atselectrolube.com



ATS ELECTRO-LUBE
INTERNATIONAL INCORPORATED

www.atselectrolube.com

THE MOST
POWERFUL
SELF-CONTAINED
LUBRICATORS
IN THE WORLD

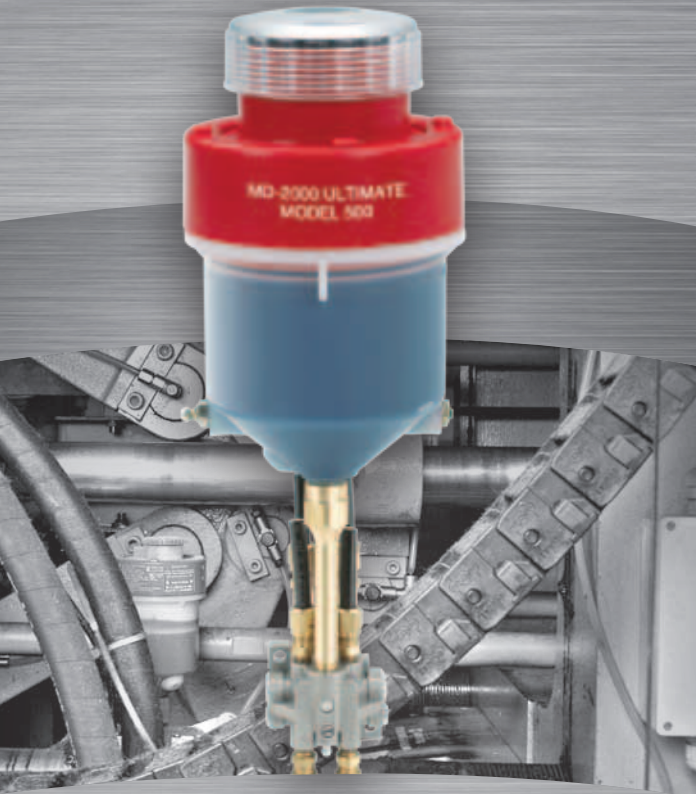

ELECTRO-LUBER SERIES

GAS-DRIVEN LUBRICANT DISPENSER – 50 PSI

JACK SERIES

MOTOR-DRIVEN JACKSCREW LUBRICANT DISPENSER – 200 PSI

ULTIMATE SERIES

MOTOR-DRIVEN LUBRICANT DISPENSER – 1000 PSI

TITAN SERIES

MOTOR-DRIVEN LUBRICANT DISPENSER – 1000 PSI

Remote Control Options available for all series



16 oz/
475cc 8 oz/
250cc 4 oz/
125cc 2 oz/
60cc



Jack 125 Luber & Replacement Cartridge



Jack 250 Luber & Replacement Cartridge







17 oz/
500cc 8 oz/
250cc 4 oz/
125cc

Includes Internal Homogenizing Mixer



Titan II Titan Oiler

Includes Internal Homogenizing Mixer

COMPARE AT A GLANCE	ELECTRO-LUBER SERIES		JACK SERIES		ULTIMATE SERIES		TITAN SERIES	
APPLICATION	Single Point		Single and Multi-Point (up to 12 points)		Single and Multi-point (up to 12 points)		Single and Multi-point (up to 12 points)	
SIZES	Available in 2, 4, 8, or 16 oz. capacity (60, 125, 250 or 475cc)		Available in 4 oz. capacity (125cc) & 8 oz. (250cc) capacity		Available in 4, 8, or 17 oz. capacity (125, 250 or 500cc)		Requires 1 or 2 - 14oz. grease cartridge. Oiler has 47 oz. capacity	
TECHNOLOGY	Safe, Inert Nitrogen gas powered		Jackscrew mechanism		Powerful mechanical fixed-displacement pump		Powerful mechanical fixed-displacement pump. Proven Ultimate Series technology	
DISPENSING POWER	Up to 50 psi. Single Point can be remote mounted to 3 ft.		200 psi. Single Point can be remote mounted up to 20ft. Multi-Point can be remote mounted up to 10ft. Distribution blocks available.		Over 1000 psi. Single Point can be remote mounted up to 35 ft. Multi-Point can be remote mounted up to 20ft. Distribution blocks available.		Over 1000 psi. Single Point can be remote mounted up to 35 ft. Multi-Point can be remote mounted up to 20 ft. Oiler up to 200 ft. or multi-point up to 60ft. Distribution blocks available.	
POWER SOURCE	AA Alkaline Batteries		Battery pack or remote AC/DC power		Battery pack or remote AC/DC power Optional lithium battery pack		Battery pack or remote AC/DC power Optional lithium battery pack	
CYCLE	Single use, Disposable		Reusable motor drive unit and easily replaceable single-use cartridge		Refillable with standard grease gun or pump		Refillable with standard grease cartridge(s). Oiler refillable through screened port	
LUBE CHOICE	Customer specified lube		Customer specified lube. Replaceable cartridge		Customer Fill/Refill as needed		Customer replaced cartridge or oiler refilled as needed	
OPERATING SPAN	15 days to 1 year on factory filled unit		Variable from 15 days to 2 years		Variable from 15 days to 2 years		Variable from 15 days to 2 years	
LED INDICATORS	Red LED - Positive verification unit is working		Tri-color LEDs indicate normal operation, low battery		Tri-color LEDs to indicate normal operation, low battery, low temp.		Tri-color LEDs indicate normal operation, low battery, low lube level, low temp. Oiler has low lube indicator.	
WEATHERPROOF	Waterproof (Submerged) to 30 ft Temp range -40°F to 131°F (-40°C to 55°C) Weathercap available		Suitable for outdoor use in temp range -4°F to 131°F (-20°C to 55°C). Use special lithium battery pack for colder/hotter temperatures. Weathercap included		Suitable for outdoor use in temp range -4°F to 131°F (-20°C to 55°C) Weathercap included		Suitable for outdoor use in temp range -4°F to 131°F (-20°C to 55°C) Weathercap included for cartridge and motor housing.	
DISPENSING RATE	Established constant flowrates, simply select and install		Standard timed intervals or custom programming available		Standard timed intervals or custom programming available		Standard timed intervals or custom programming available	
APPROVALS	UL & Cul approved Intrinsically Safe for all areas; MSHA, Energy Mines Canada IECEX BAS 11.0121x & 11.0120x 		Class I, Groups A, B, C, D. Div 2 Class II, Div 2, Groups F & G Class III hazardous locations  T-Code T6 55°C PATENTED		Class I, Groups A, B, C, D. Div 2 Class II, Div 2, Groups F & G Class III hazardous locations  T-Code T6 55°C PATENTED		Class I, Groups A, B, C, D. Div 2 Class II, Div 2, Groups F & G Class III hazardous locations  T-Code T6 55°C PATENTED	

DISTRIBUTED BY: **WESTPOWER** - orders@westpowergroup.com (403) 720 3300 westpowergroup.com www.atselectrolube.com